GS Eco Vela

PVC-Free and Recyclable Solar Control Fabrics
綠色環保透景遮陽織物

VELA

5%
Openness Factor
開孔率

170g/m²
Weight
克重

0.38mm
Thickness
厚度

300cm
Width
幅寬

Gs Eco Vela: Fabric Specification and Fenestration Properties
技術參數及光熱性能表

- 100% PVC-free 完全不含聚氯乙烯
- Halogen-free 不含鹵素-燃燒無毒

International Fire Rating Standard 阻燃等級

B1	德國 DIN 4102 B1	
B1	中國 GB50222 B1	
M1	法國 NF P92-503	

	Openness Factor / OF 開孔率	Ultraviolet Transmittance / Tuv 紫外線 穿透率	Light Transmittance / Tv 可見光 穿透率	Light Reflectance / Rv 可見光 反射率	Solar Transmittance / Ts 熱能 透射率	Solar Reflectance / Rs 熱能 反射率	Solar Absorption / As 熱能吸收率
0202 White 白色	5%	20%	49%	53%	48%	49%	3%
2020 Linen 米色	5%	19%	43%	45%	45%	44%	11%
0707 Pearl 珠灰	5%	18%	32%	34%	40%	40%	20%
3041 Pewter 藍灰	5%	12%	14%	11%	32%	29%	39%
0606 Bronze 棕色	5%	8%	10%	7%	29%	26%	45%

The fenestration properties were tested in accordance with EN410 standard.
以上數據依據歐洲EN 410標準測試。

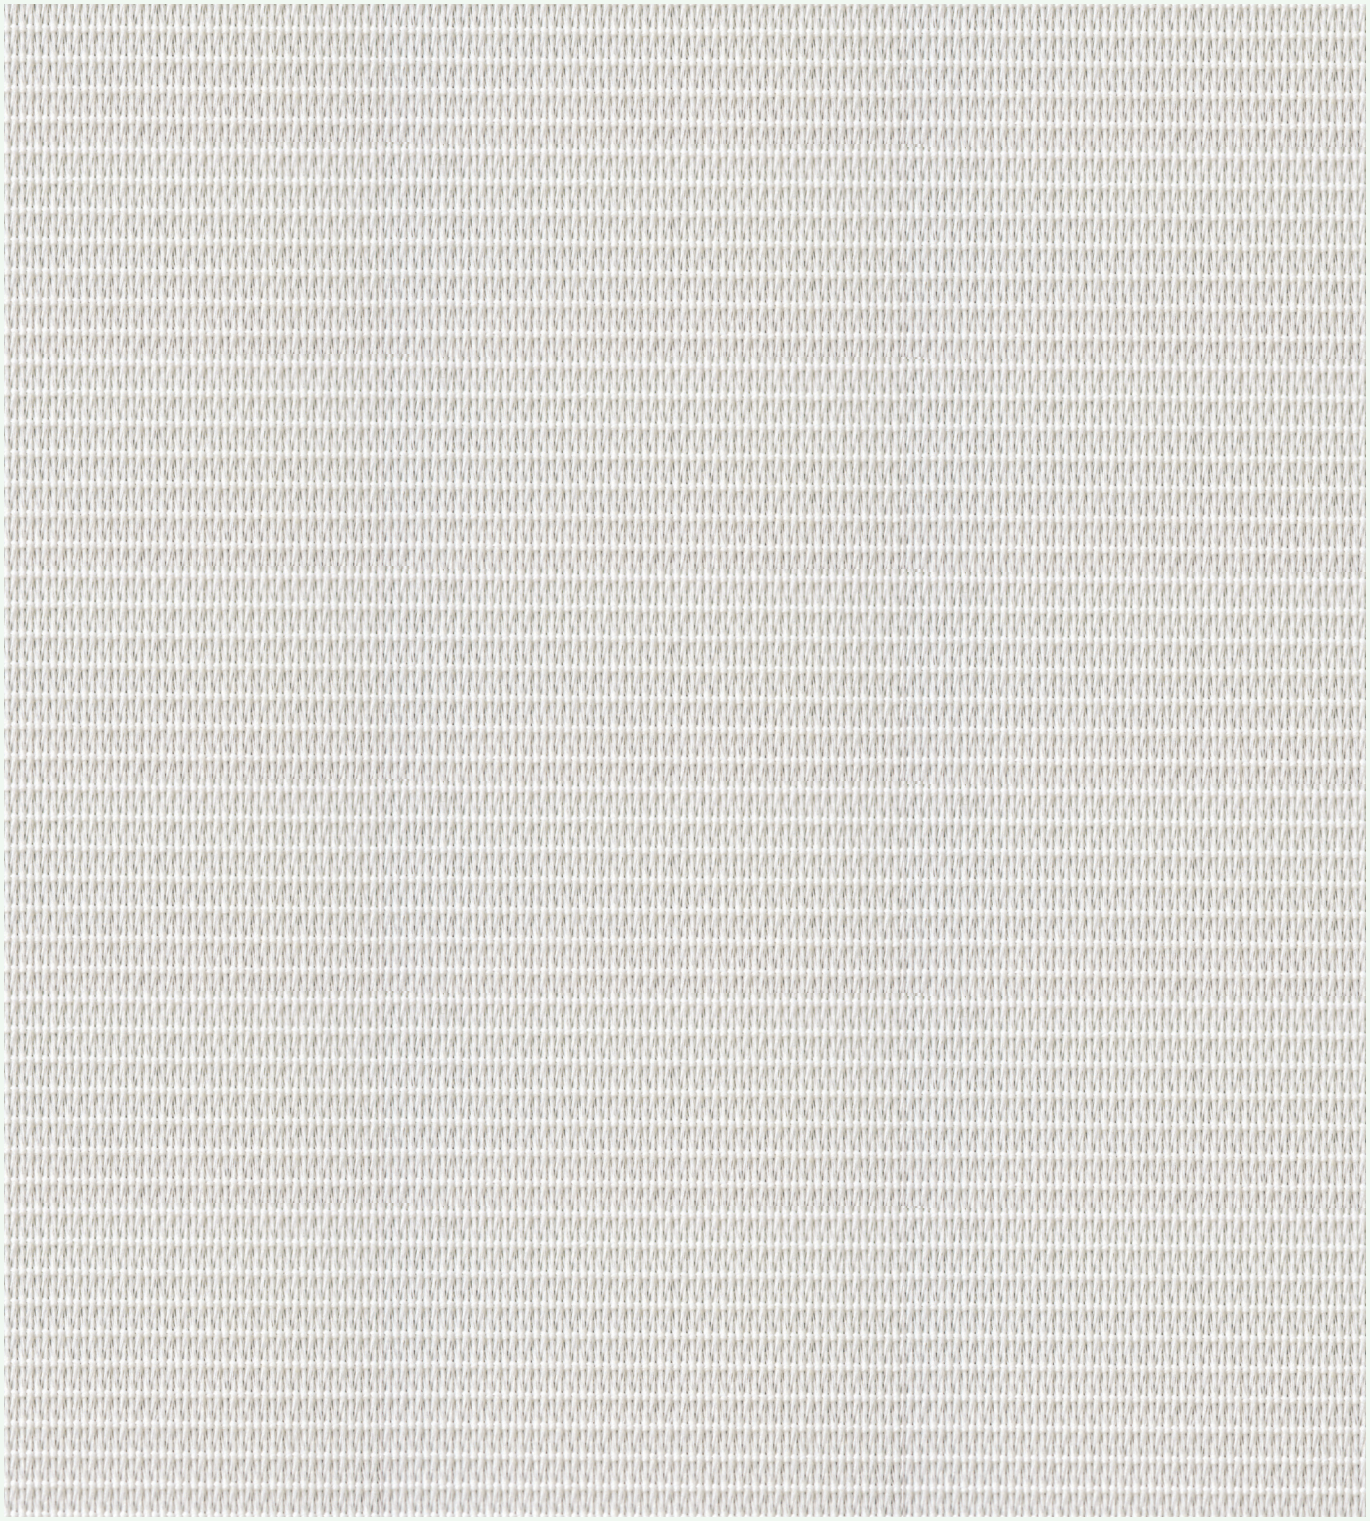

0202 White 白色



2020 Linen 米色

0707 Pearl 珠灰



3041 Pewter 蓝灰



0606 Bronze 棕色

Cradle to Cradle
Bronze Certified

Greenguard
Gold Certified

100%
PVC-free

Fully
Recyclable

MERMET

www.turnils-mermet.com.cn